



PERFECT BOUND OR STITCHED EDGE




ADDRESS PLACEMENT BOUND EDGE TO THE RIGHT

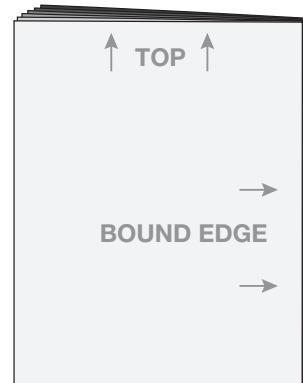


Determine top edge. (Short edge with bound edge to the right)

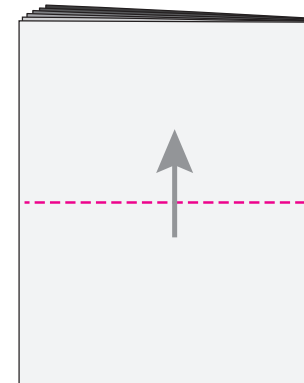


Address must go in top half.

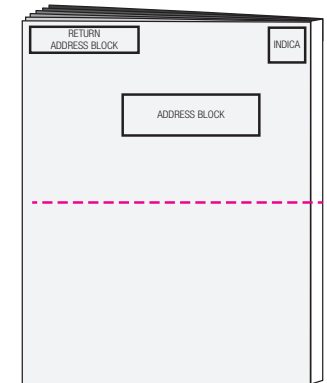


Right side up. **Acceptable.**

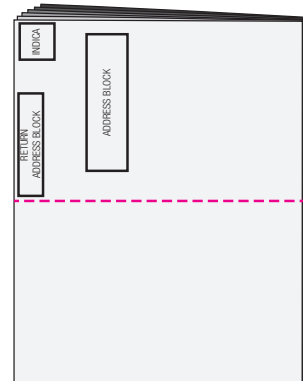

Perpendicular left. **Acceptable.**

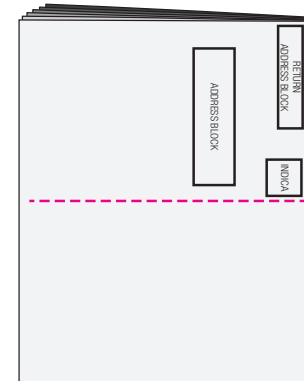

Perpendicular right. **Acceptable.**

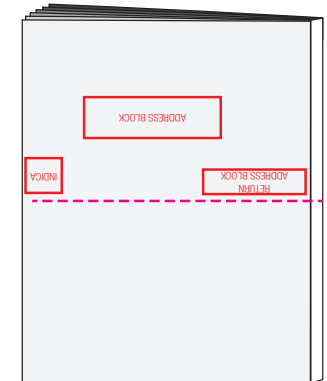

Upside down. **Fail.**

Tabbing

Tabbing may be required to contain loose inserts.

Thickness

$\geq .009'' - \leq 0.75''$
READ →

Deflection

Deflection standards must be used as a part of the overall design.

Address

Address element placement may vary as long as you comply with the above design requirements.

Flats: Bound Edge